

HALOGEN REPLACEMENT

TWIN EAGLES SERIES





Step 1: Locate Philips head screw and rotate counterclockwise with screwdriver to remove






Step 2: Pull the lamp assembly down and with a flat blade screwdriver, slightly bend the securing bracket on the side of the lamp assembly while pulling on the glass cover until it comes free.



Step 3: Pull on the halogen bulb until it comes free



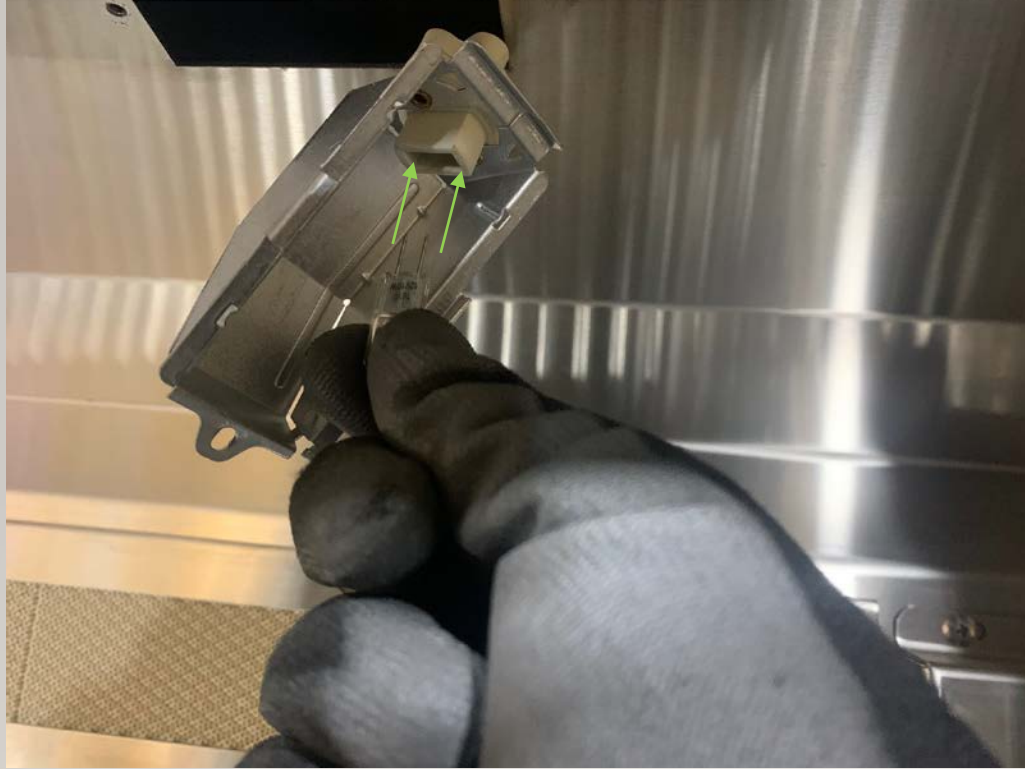

Step 4: While wearing safety glove or latex gloves (never touch a new halogen bulb with bare skin as the oils from your skin will shorten the lifespan of a halogen bulb) push in the lamp into the assembly.



Final Step: Test bulb by pressing on the light switch, turn back off. Snap the glass back into place and press the halogen assembly back into its slot and tighten the screw clockwise.

